

Filter Media

Type ZLW



TROX

6295 E Molloy Rd Suite 3, East Syracuse, NY 13057
sales-amn@troxgroup.com
www.trox-northamerica.com



TROX Social:



ZLW

General Information

General information	2	Order code	5
Technical data	3	Dimensions	6
Specification text	4		

General information

Application

- Z-line filter type ZLW for the separation of coarse dust in ventilation and air conditioning systems
- Coarse dust filter: Prefilter in ventilation systems

Special features

- High dust holding capacity at low initial differential pressure
- Long filter life
- Quick fitting and removal
- Low weight and small transport volume
- Can be easily and safely disposed of in municipal refuse incineration plants as emissions are low in harmful substances

Nominal sizes

- B x H x T [mm (in)]

Filter classes

Filter group

- ISO Coarse to ISO 16890 (comparable to ASHRAE 52.2 MERV ratings)

Filter classes

- Coarse 90 % [MERV 11]
- Coarse 60 % [MERV 8]

Construction

- PLA: Frame made of plastic
- PLAF: Frame made of plastic with 25 mm (1 in)

flange

- CBG: Cardboard frame glued
- CBC: Cardboard frame punched
- CBS: Cardboard frame stapled
- GAL: Galvanised sheet steel
- STA: Stainless steel
- AL: Aluminium

Useful additions

- Standard cell frame (SCF-B), filter wall (SIF), universal casing (UCA)

Construction features

- Folded filter media
- Moisture-resistant, stable cardboard frame
- Available in various filter classes and sizes, including commercial installation depths and cross-sections

Materials and surfaces

- Filter media made of synthetic fibres
- Cardboard frame
- Optional frame made of plastic, galvanised sheet steel, stainless steel or aluminium
- Optionally with flat profile seal on the upstream or downstream side or on both sides

Standards and guidelines

- Test according to ISO 16890; international standard for general ventilation and air conditioning; classification of efficiency based on the measured fractional efficiency, which is processed into a reporting system for the fine dust efficiency (ePM (MERV))
- For coarse dust filters, the gravimetric separation is measured with synthetic dust
- The filters are classified into filter group ISO Coarse (MERV) depending on the tested values
- For fine dust filters, the fractional arrestance efficiency of a certain size range is determined by aerosols (DEHS and KCl)
- The filters are classified into filter groups ISO ePM10, ISO ePM2.5 and ISO ePM1 (comparable to ASHRAE 52.2 MERV ratings) depending on the tested values

Technical data

Gravimetric efficiency Coarse [%] according to ISO 16890	60	90
Estimated ASHRAE 52.2 Rating	MERV 8	MERV 11
Nominal face velocity [m/s (fpm)]	2.5 (492)	2.5 (492)
Initial differential pressure [Pa (in. w.g.)] at nominal volume flow rate for T = 48 mm (2 in)	50 (0.20)	90 (0.36)
Initial differential pressure [Pa(in. w.g.)] at nominal volume flow rate for T = 96 mm (4 in)	35 (0.14)	70 (0.28)
Maximum operating temperature [°C (°F)]	60 (140)	60 (140)
Maximum relative humidity [%]	100	100

Specification text

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design program.

Specification text

Z-line filter type ZLW for the separation of coarse dust when used as prefilters in ventilation and air conditioning systems. Z-line filters are available in various filter sizes, including common installation depths and cross-sections, filter group ISO Coarse according to ISO 16890 (comparable to ASHRAE 52.2 MERV ratings). The filter media is folded, increasing the dust holding capacity and extending the filter life.

Special features

- High dust holding capacity at low initial differential pressure
- Long filter life
- Quick fitting and removal
- Low weight and small transport volume
- Can be easily and safely disposed of in municipal refuse incineration plants as emissions are low in harmful substances

Materials and surfaces

- Filter media made of synthetic fibres
- Cardboard frame

Optional frame made of plastic, galvanised sheet steel, stainless steel or aluminium
Optionally with flat profile seal on the upstream or downstream side or on both sides

Construction

- PLA: Frame made of plastic
- PLAF: Frame made of plastic with 25 mm (1 in) flange
- CBG: Cardboard frame glued
- CBC: Cardboard frame punched
- CBS: Cardboard frame stapled
- GAL: Galvanised sheet steel
- STA: Stainless steel
- AL: Aluminium

Sizing data

- Filter group [ISO 16890 (MERV)]
- Efficiency [%]
- Volume flow rate [m³/h (cfm)]
- Initial differential pressure [Pa (in. w.g)]
- Nominal size [mm (in)]

Order code

ZLW 3 Coarse 3 60 % 3 CBG / 592 x 592 x 48 / FNB

1 2 3 4 5 6

1 Type

ZLW Z-line filter

2 Classification

Coarse Gravimetric separation efficiency according to ISO 16890 (acc. to ASHRAE 52.2) / MERV

3 Separation efficiency

Separation efficiency [%] according to ISO 16890 (acc. to ASHRAE 52.2)

4 Construction

CBG Cardboard frame, glued

CBC Cardboard frame, punched

CBS Cardboard frame, with clamps

PLA Plastic frame

PLAF Plastic frame with 25 mm (1 in) flange

GAL Frame made of galvanised sheet steel

STA Frame made of stainless steel

AL Aluminium frame

5 Nominal size [mm]

Specify size (width x height x depth)

6 Seal

No entry: without seal

FNU Flat seal on the upstream side

FND Flat seal on the downstream side


FNB Flat seal on both sides

Order example: ZLW-Coarse-60%-CBG/592x592x48

Type	ZLW
Classification	Gravimetric separation efficiency according to ISO 16890 (ASHRAE 52.2).
Separation efficiency	60 %
Variant	Cardboard frame, glued
Nominal size [mm (in)]	Width 592 (23 5/16), height 592 (23 5/16), depth 48 (2)
ZLW3Coarse390%3PLA/592×592×48	
Classification	ISO Coarse to ISO 16890 (acc. to ASHRAE 52.2).
Efficiency	90 %
Construction	Plastic frame
Nominal size	592 (23 5/16) × 592 (23 5/16) × 48 (2) mm (in)

Dimensions

ZLW, 48 mm (2 in.) and 96 mm (4 in.)

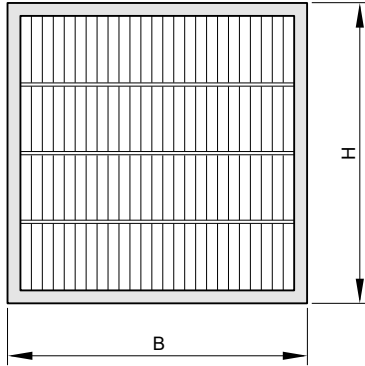

ZLW

Dimensions

Product specific data

Construction CBS

[1]						Filter class		[2]				[3]		[4]		[5]	
B		H		T				qv				ΔpA		Area		Mass	
[mm]	[in.]	[mm]	[in.]	[mm]	[in.]			[l/s]	[cfm]	[m³/h]	[cfm]	[Pa]	[in. w.g.]	[m²]	[sqft]	[kg]	[lb]
287	11 5/16	287	11 5/16	48	2	Coarse 60 %	MERV 8	222	471	800	471	50	0.20	0.3	3.2	0.3	0.7
287	11 5/16	592	23 5/16	48	2	Coarse 60 %	MERV 8	444	942	1600	942	50	0.20	0.6	6.5	0.5	1.1
592	23 5/16	592	23 5/16	48	2	Coarse 60 %	MERV 8	889	1883	3200	1883	50	0.20	1.2	12.9	0.8	1.8
287	11 5/16	287	11 5/16	96	4	Coarse 60 %	MERV 8	222	471	800	471	75	0.30	0.6	6.5	0.4	0.9
287	11 5/16	592	23 5/16	96	4	Coarse 60 %	MERV 8	444	942	1600	942	75	0.30	1.1	11.8	0.8	1.8
592	23 5/16	592	23 5/16	96	4	Coarse 60 %	MERV 8	889	1883	3200	1883	75	0.30	2.2	23.7	1.5	3.3
287	11 5/16	287	11 5/16	48	2	Coarse 90 %	MERV 11	222	471	800	471	35	0.14	0.3	3.2	0.3	0.7
287	11 5/16	592	23 5/16	48	2	Coarse 90 %	MERV 11	444	942	1600	942	35	0.14	0.6	6.5	0.5	1.1
592	23 5/16	592	23 5/16	48	2	Coarse 90 %	MERV 11	889	1883	3200	1883	35	0.14	1.2	12.9	0.8	1.8
287	11 5/16	287	11 5/16	96	4	Coarse 90 %	MERV 11	222	471	800	471	60	0.24	0.6	6.5	0.4	0.9
287	11 5/16	592	23 5/16	96	4	Coarse 90 %	MERV 11	444	942	1600	942	60	0.24	1.1	11.8	0.8	1.8
592	23 5/16	592	23 5/16	96	4	Coarse 90 %	MERV 11	889	1883	3200	1883	60	0.24	2.2	23.7	1.5	3.3

volume flow rate, [3] Initial differential pressure, [4] Filter area, [5] Weight